

WGS06 Linear Rails with 43000 Series Hybrid Motor


*Also available with 57000 Series Hybrid Motor (info available starting on page 5)

The Motorized WGS Linear Slide utilizes a screw-driven carriage that offers reliable, continuous linear speed while maintaining accurate positioning. The length and speed of the WGS is not limited by critical screw speed, allowing high RPM, linear speed and long stroke lengths. The WGS slide has a unique, compact profile that provides improved torsional stiffness and stability over RGS and RGW products.

Technical specifications for 43000 Series Size 17 Hybrid Linear Actuator Stepper Motors and Haydon Kerk IDEA™ programmable drives are on page 3, 57000 Series Size 23 specifications are on page 5.

To determine what is best for your application see the [Linear Rail Applications Checklist](#).

WGS06 with 43000 Series Size 17 hybrid linear stepper motor

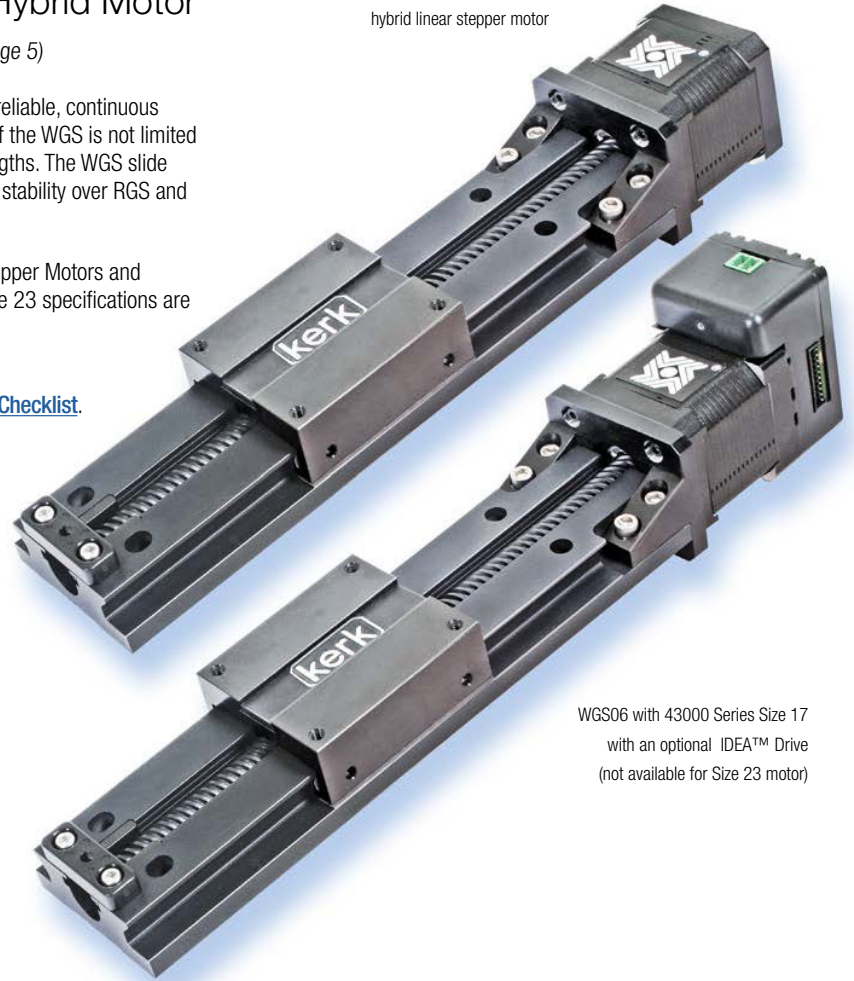

WGS06 with 43000 Series Size 17 with an optional IDEA™ Drive (not available for Size 23 motor)

■ Identifying the WGS06 Part Number Codes when Ordering


WG	S	06	K	G	0100	XXX
Prefix	Frame Style	Frame Size Load*	Lubrication	Drive / Mounting	Nominal Thread Lead Code	Unique Identifier
WG = Wide Guide Screw	S = Standard	06 = 35 lbs (156 N) (Maximum static load)	K = TFE Kerkote®	M = Motorized G = Motorized + IDEA™ integrated programmable drive – USB communications J = Motorized + IDEA™ integrated programmable drive – RS485 communications	0100 = .100-in (2.54) 0200 = .200-in (5.08) 0500 = .500-in (12.70) 1000 = 1.000-in (25.4)	– M43 = 43000 Series-Size 17 Motor – G43 = 43000 Series Size 17 Motor with IDEA Drive – M57 = 57000 Series-Size 23 Motor – or a proprietary suffix assigned to a specific customer application. The identifier can apply to either a standard or custom part.

NOTE: Dashes must be included in Part Number (-) as shown above. For assistance call our Engineering Team at 603 213 6290.

Carriage holes available in Metric sizes M3, M4, M5, M6

■ WGS06 Linear Slide with 43000 Series Size 17 Linear Actuator

Recommended for horizontal loads up to 35 lbs (156 N)

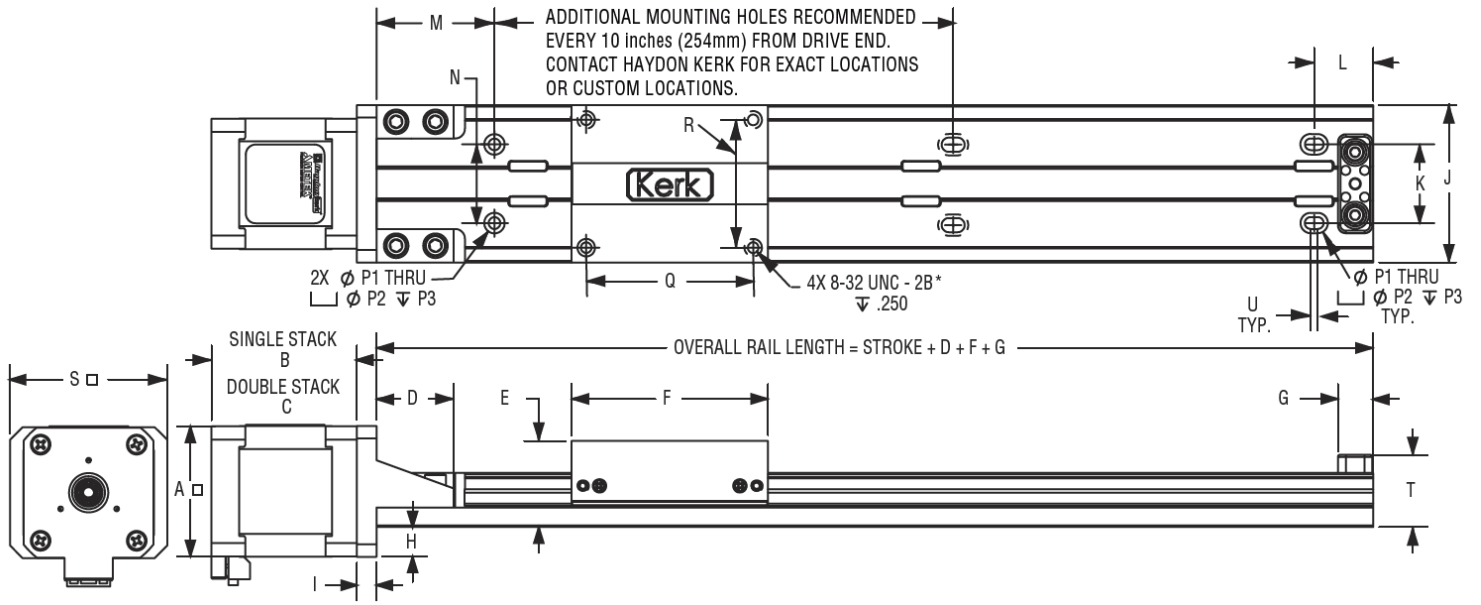


	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P1	P2	P3	Q	R	S	T	U
(mm)	(42.2)	(33.8)	(47.75)	(24.9)	(27.9)	(63.5)	(11.2)	(9.7)	(6.4)	(50.8)	(25.4)	(19.1)	(38.1)	(25.4)	(3.81)	(6.60)	(6.50)	(53.95)	(41.25)	(50.8)	(23.3)	(2.3)
inch	1.660 MAX.	1.330 MAX.	1.880 MAX.	0.98	1.1	2.50	0.44	0.38	0.250	2.00	1.000	0.75	1.50	1.000	0.150	0.260	0.256	2.124	1.624	2.00	0.92	0.090

* Metric threads also available for carriage.

...with IDEA™ Drive

Wiring	Bipolar
Winding Voltage	2.33 VDC

Contact Haydon Kerk if a higher voltage motor is desired.

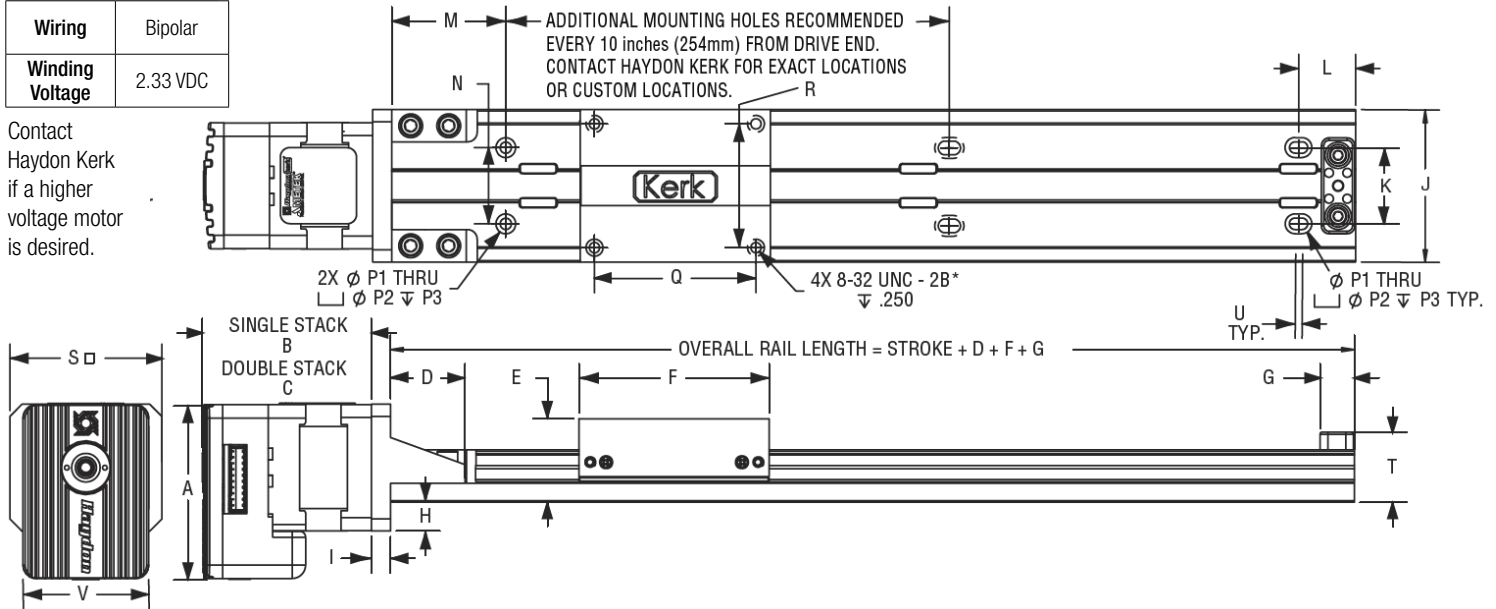

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P1	P2	P3	Q	R	S	T	U	V
(mm)	(58.0)	(63.72)	(77.67)	(24.9)	(27.9)	(63.5)	(11.2)	(9.7)	(6.4)	(50.8)	(25.4)	(19.1)	(38.1)	(25.4)	(3.81)	(6.60)	(6.50)	(53.95)	(41.25)	(50.8)	(23.3)	(2.3)	(42.0)
inch	2.283 MAX.	2.509 MAX.	3.058 MAX.	0.98	1.1	2.50	0.44	0.38	0.250	2.00	1.000	0.75	1.50	1.000	0.150	0.260	0.256	2.124	1.624	2.00	0.92	0.090	1.66

* Metric threads also available for carriage.

Single Stack

43000 Series Size 17

Size 17: 43 mm (1.7-in) Hybrid Linear Actuator (1.8° Step Angle)

Wiring	Bipolar			Unipolar**	
Programmable Drive	IDEA Drive option available			Not applicable	
Winding Voltage	2.33 VDC	5 VDC	12 VDC	5 VDC	12 VDC
Current (RMS)/phase	1.5 A	700 mA	290 mA	700 mA	290 mA
Resistance/phase	1.56 Ω	7.2 Ω	41.5 Ω	7.2 Ω	41.5 Ω
Inductance/phase	1.9 mH	8.7 mH	54.0 mH	4.4 mH	27.0 mH
Power Consumption	7 W				

** Unipolar drive gives approximately 30% less thrust than bipolar drive.

Nominal Thread Lead		Lead Code
inches	mm	
0.1	2.54	0100
0.2	5.08	0200
0.5	12.7	0500
1.0	25.4	1000



43000 Series Size 17
Single Stack External Linear

Double Stack

43000 Series Size 17

Size 17 Double Stack: 43 mm (1.7-in) Hybrid Linear Actuator (1.8° Step Angle)

Wiring	Bipolar		
Programmable Drive	IDEA Drive option available		
Winding Voltage	2.33 VDC	5 VDC	12 VDC
Current (RMS)/phase	2.6 A	1.3 A	550 mA
Resistance/phase	0.9 Ω	3.8 Ω	21.9 Ω
Inductance/phase	1.33 mH	8.21 mH	45.1 mH
Power Consumption	13.2 W		

* 43000 Series Single Stack with IDEA programmable drive. Contact Haydon Kerk if higher voltage motor is desired.

Nominal Thread Lead		Lead Code
inches	mm	
0.1	2.54	0100
0.2	5.08	0200
0.5	12.7	0500
1.0	25.4	1000




Size 17 External Linear
with programmable IDEA Drive

IDEA™ Drive software is simple to use with on-screen buttons and easy-to-understand programming guides.

- Fully Programmable
- RoHS Compliant
- USB or RS-485 Communication
- Microstepping Capability – Full, 1/2, 1/4, 1/8, 1/16, 1/32, 1/64
- Graphic User Interface
- Auto-population of Drive Parameters
- Programmable Acceleration/Deceleration and Current Control


For more information see the [IDEA™ Drive Data Sheet](#)

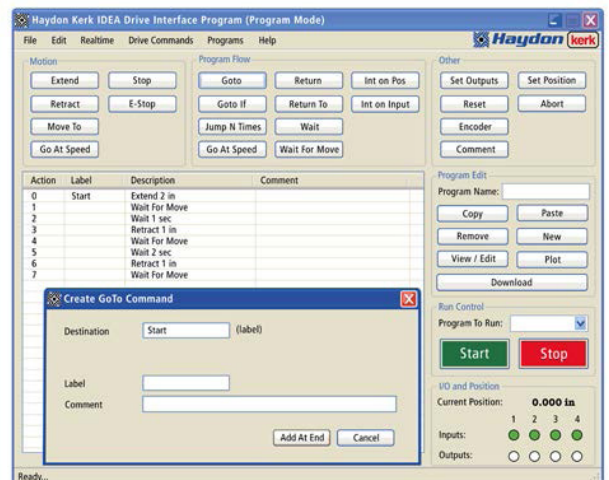

Single Stack

FORCE vs. PULSE RATE


– Chopper – Bipolar – 100% Duty Cycle

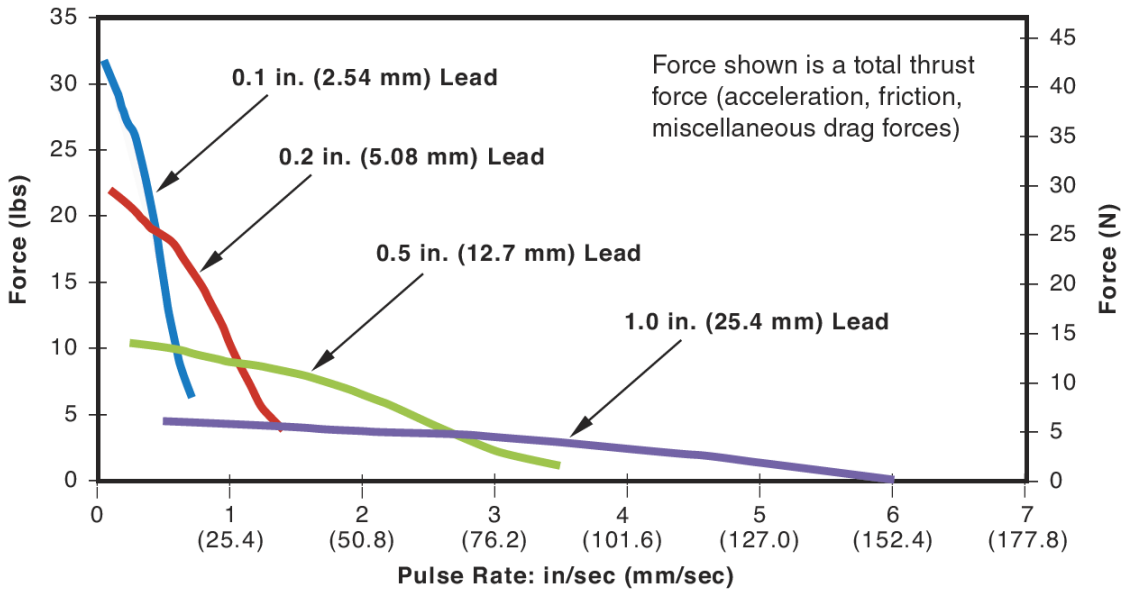

Double Stack

FORCE vs. PULSE RATE

– Chopper – Bipolar – 100% Duty Cycle

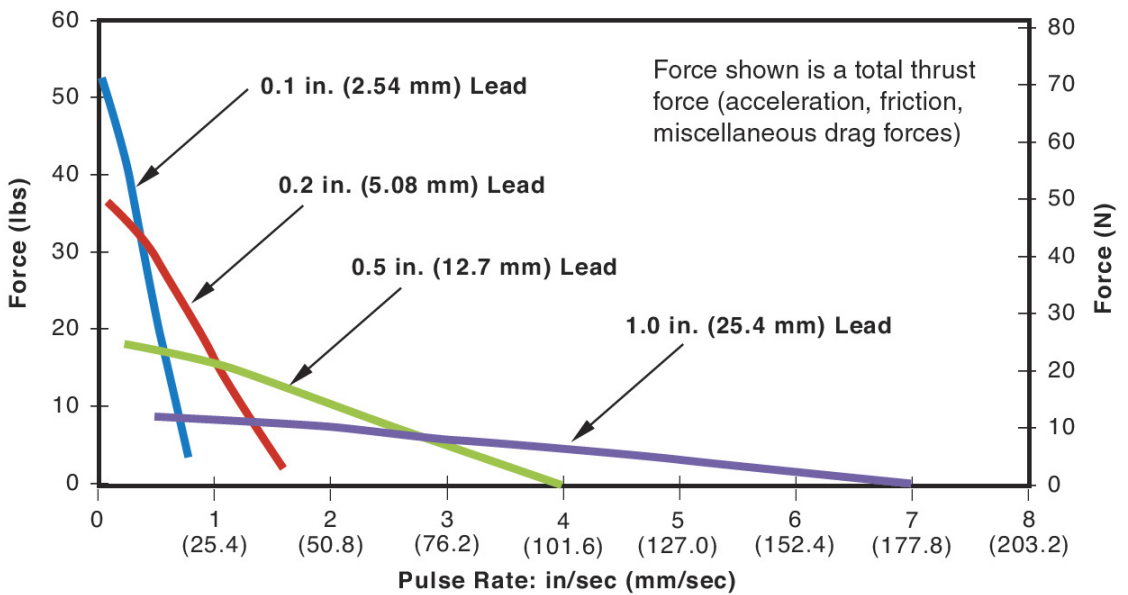

NOTE: All chopper drive curves were created with a 5 volt motor and a 40 volt power supply. Ramping can increase the performance of a motor either by increasing the top speed or getting a heavier load accelerated up to speed faster. Also, deceleration can be used to stop the motor without overshoot.

With L/R drives peak force and speeds are reduced, using a unipolar drive will yield a further 30% force reduction

Single Stack


57000 Series Size 23

Size 23: 57 mm (2.3-in) Hybrid Linear Actuator (1.8° Step Angle)

Wiring	Bipolar			Unipolar**	
	3.25 VDC	5 VDC	12 VDC	5 VDC	12 VDC
Winding Voltage	3.25 VDC	5 VDC	12 VDC	5 VDC	12 VDC
Current (RMS)/phase	2.0 A	1.3 A	.54 A	1.3 A	.54 A
Resistance/phase	1.63 Ω	3.85 Ω	22.2 Ω	3.85 Ω	22.2 Ω
Inductance/phase	3.5 mH	10.5 mH	58 mH	5.3 mH	23.6 mH
Power Consumption	13 W				

** Unipolar drive gives approximately 30% less thrust than bipolar drive.

Nominal Thread Lead		Lead Code
inches	mm	
0.1	2.54	0100
0.2	5.08	0200
0.5	12.7	0500
1.0	25.4	1000

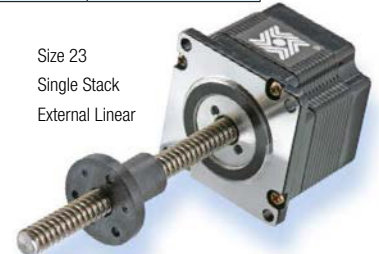

Size 23
Single Stack
External Linear

Double Stack

57000 Series Size 23

Size 23 Double Stack: 57 mm (2.3-in) Hybrid Linear Actuator (1.8° Step Angle)

Wiring	Bipolar		
	3.25 VDC	5 VDC	12 VDC
Winding Voltage	3.25 VDC	5 VDC	12 VDC
Current (RMS)/phase	3.85 A	2.5 A	1 A
Resistance/phase	0.98 Ω	2.0 Ω	12.0 Ω
Inductance/phase	2.3 mH	7.6 mH	35.0 mH
Power Consumption	25 W Total		

Nominal Thread Lead		Lead Code
inches	mm	
0.1	2.54	0100
0.2	5.08	0200
0.5	12.7	0500
1.0	25.4	1000




Size 23
Double Stack
External Linear

WGS Series • WGS06 Motorized • Size 23 57000 Series • Dimensional Drawings

WGS06 Linear Slide with 57000 Series Size 23 Linear Actuator

Recommended for horizontal loads up to 35 lbs (156 N)

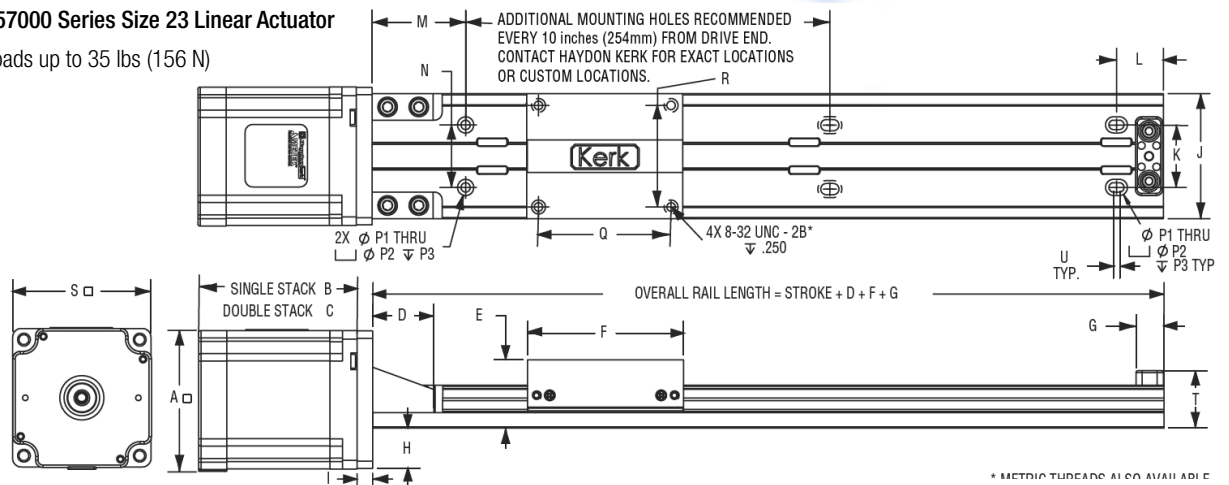

* METRIC THREADS ALSO AVAILABLE


	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P1	P2	P3	Q	R	S	T	U
(mm)	(56.4)	(45.2)	(66)	(24.9)	(27.9)	(63.5)	(11.2)	(16.5)	(6.4)	(50.8)	(25.4)	(19.1)	(38.1)	(25.4)	(3.81)	(6.60)	(6.50)	(53.95)	(41.25)	(56.4)	(23.3)	(2.3)
inch	2.220 MAX.	1.780 MAX.	2.598 MAX.	0.98	1.1	2.50	0.44	0.65	0.250	2.00	1.000	0.75	1.50	1.000	0.150	0.260	0.256	2.124	1.624	2.220 MAX.	0.92	0.090

* Metric threads also available for carriage.

Single Stack


FORCE vs. PULSE RATE

– Chopper – Bipolar – 100% Duty Cycle

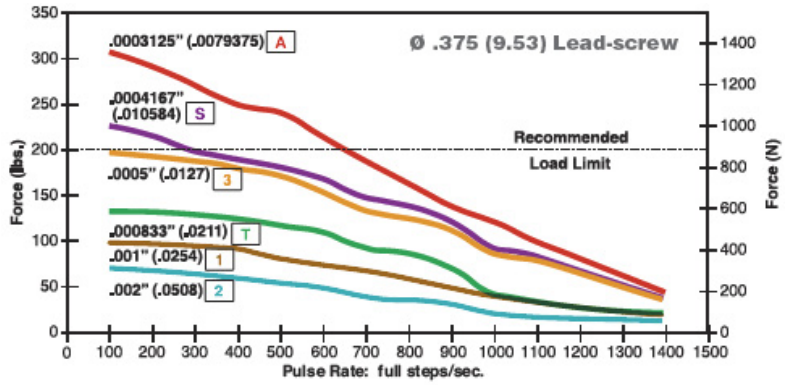

FORCE vs. LINEAR VELOCITY


– Chopper – Bipolar – 100% Duty Cycle

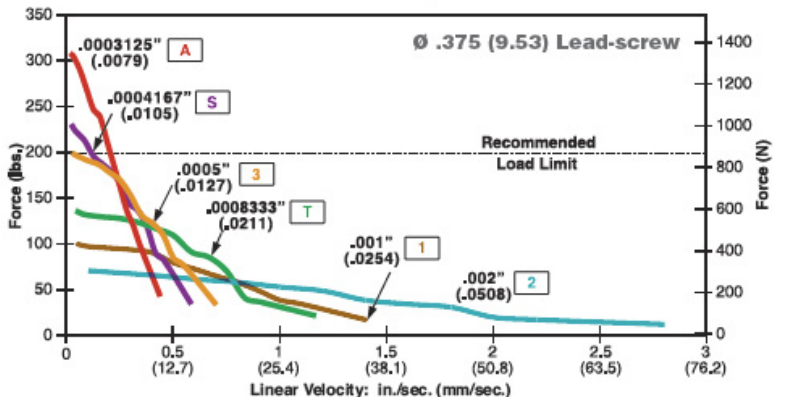

Double Stack


FORCE vs. PULSE RATE

– Chopper – Bipolar – 100% Duty Cycle

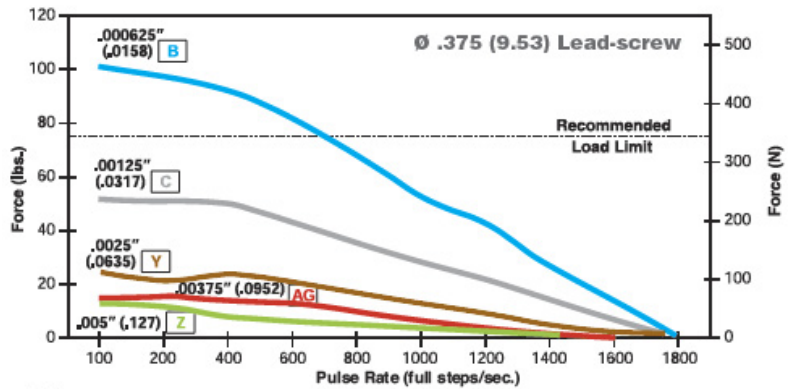

FORCE vs. LINEAR VELOCITY

– Chopper – Bipolar – 100% Duty Cycle

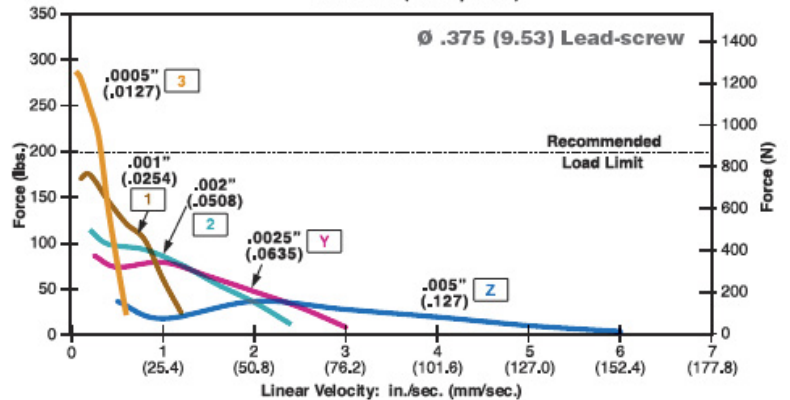

NOTE: All chopper drive curves were created with a 5 volt motor and a 40 volt power supply. Ramping can increase the performance of a motor either by increasing the top speed or getting a heavier load accelerated up to speed faster. Also, deceleration can be used to stop the motor without overshoot.

With L/R drives peak force and speeds are reduced, using a unipolar drive will yield a further 30% force reduction


■ 43000 Series Size 17 and 57000 Series Size 23

Hybrids: Stepping Sequence

	Bipolar	Q2-Q3	Q1-Q4	Q6-Q7	Q5-Q8
	Unipolar	Q1	Q2	Q3	Q4
↑	Step				
↓	1	ON	OFF	ON	OFF
	2	OFF	ON	ON	OFF
	3	OFF	ON	OFF	ON
	4	ON	OFF	OFF	ON
	1	ON	OFF	ON	OFF

Note: Half stepping is accomplished by inserting an off state between transitioning phases.

Hybrids: Wiring

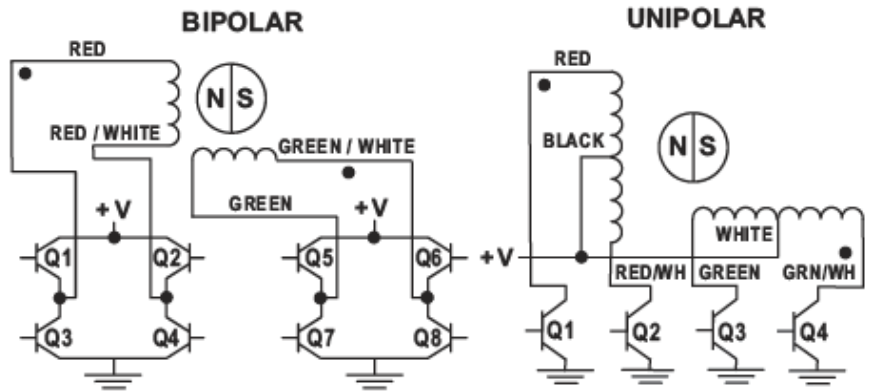

Size 17 43000 Series • Integrated Connectors


Haydon Kerk Hybrid Size 17 Single and Double Stack linear actuators are available with an integrated connector. Offered alone or with a harness assembly, this connector is RoHS compliant and features a positive latch in order for high connection integrity. The connector is rated up to 3 amps and the mating connector will handle a range of wire gauges from 22 to 28. This motor is ideal for those that want to plug in directly to pre existing harnesses. In addition to standard configurations, Haydon Kerk Motion Solutions can custom design this motor to meet your specific application requirements.



Dimensional Drawings

■ Integrated Connector with 43000 Series Size 17

Dimensions = (mm) inches

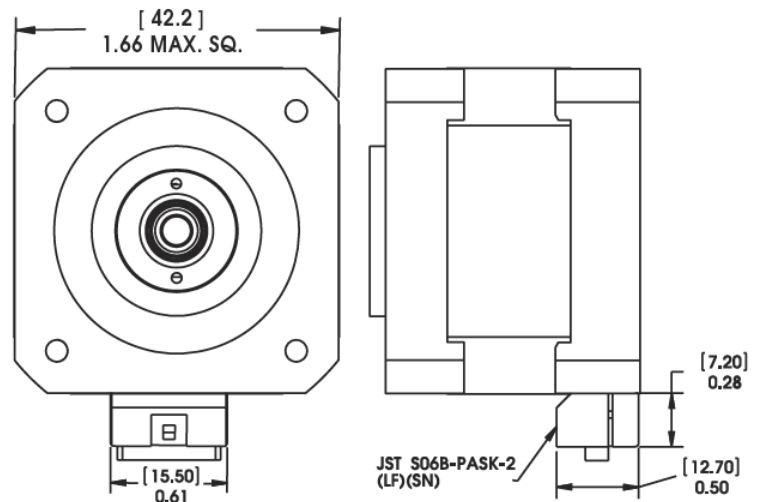

- Motor Connector:** JST part # S06B-PASK-2
- Mating Connector:** JST part # PAP-06V-S
Haydon Kerk Part #56-1210-5 (12 in. Leads)
- Wire to Board Connector:** JST part number SPHD-001T-P0.5

Pin #	Bipolar	Unipolar	Color
1	Phase 2 Start	Phase 2 Start	G/W
2	Open	Phase 2 Common	-
3	Phase 2 Finish	Phase 2 Finish	Green
4	Phase 1 Finish	Phase 1 Finish	R/W
5	Open	Phase 1 Common	-
6	Phase 1 Start	Phase 1 Start	Red